



Chorus 46

(single and double leaf)



Timber Acoustic & Fire Rated Doorsets

Door Leaf

- Huet multi-layer acoustic core
- Thickness: 51mm hardwood stiles all round
- High stability leaf due to the inclusion of 2 steel sheets

Door Frame

- Hardwood
- Rebated monoblock frame
- Variety of widths
- Extension linings available
- Frame can be lacquered, stained or varnished
- Frame can be wrapped with wood veneer to match door leaf facings

Choice of Door Facings

- Primed
- Wood veneers
- Laminated
- White paint finish + other colour available by request
- Grooved to a wide choice of standard and bespoke finishes

Ironmongery

- 4 lift-off hinges - 160 x 70mm black or stainless steel
- Cut-outs/mortices are available to suit a variety of locks and handles
- Cut-outs/mortices are available to suit a large choice of electromagnetic lock
- Spy hole
- Concealed door closer available: DORMA ITS96
- Electric striking plate (available on single leaf)

Perimeter Seals

- Intumescent seals factory fitted (within the frame and leaf)
- Combined smoke and acoustic seals fitted within the frame and leaf
- Large thresholds selection



Rw 46dB

FCBA 404-07-101-7



EI30 FD30

EITHER SIDE – CSTB RS14-089




3c Stability*




Smoke Seal

S_a Classification


EN 13501-2 - BS EN 1634-3




400x300



1200x200



1200x300



1200x400

*Stability of the door leaf is an important factor, particularly in areas of temperature variance between rooms or between rooms and corridors. Any distortion of the door leaf will result in the seals not functioning correctly. With the inclusion of a minimum of 2 steel sheets and other materials, Huet door leaves offer less than 2mm of distortion. The result is a door leaf and seal which continues to perform even with wide temperature differences.



Tel: +33 22 812 0413

Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716

W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za



All sizes are in mm

FEBRUARY 2020









Chorus 46


(single and double leaf)




Timber Acoustic & Fire Rated Doorsets

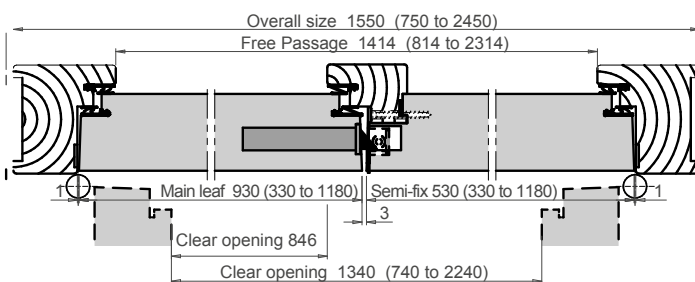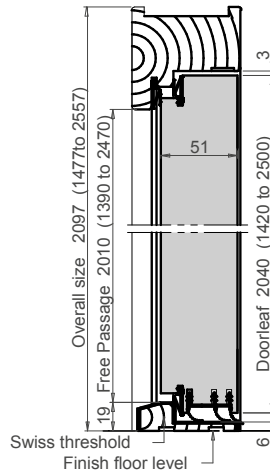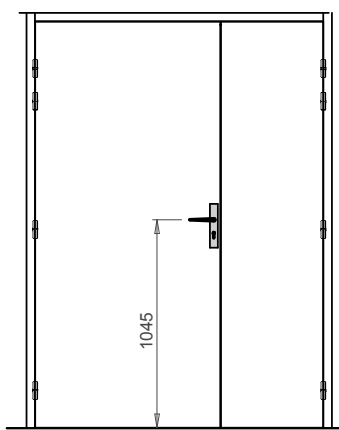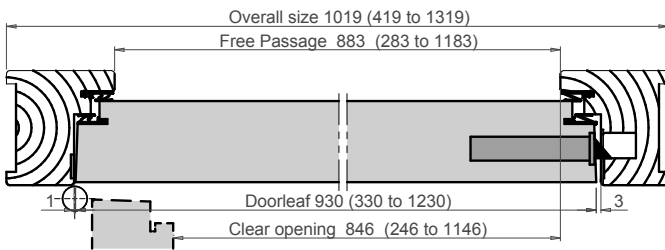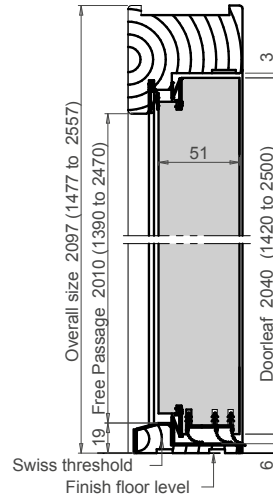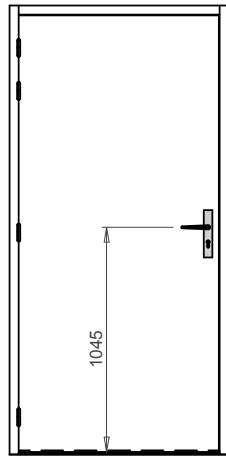


Swiss threshold 35x20




Swiss threshold 50x20




Swiss threshold 67x19




Pyramidal threshold 67x15




Flat threshold 35x12




Lip seal




Mechanical drop seal



Flat threshold 35x12



Pyramidal threshold 67x15



Tel: +33 22 812 0413
Rgd Office: JH INDUSTRIES
30 rue Pauline de Lézardière
85300 Challans FRANCE
www.huet-doors.co.uk



Tel: +27 21 852 1716
W.R Quinan Boulevard, Paardevlei,
Somerset West Western Cape, SOUTH AFRICA
sales@varilux.co.za
www.varilux.co.za

All sizes are in mm

FEBRUARY 2020



© JH INDUSTRIES
Any reproduction, even partial, is forbidden.